

Internet Technology

The “inner network“ view, part 2 (D): MPLS

Michael Welzl <http://www.welzl.at>


DPS NSG Team <http://dps.uibk.ac.at/nsg>
Institute of Computer Science
University of Innsbruck, Austria

Interdomain Traffic Engineering

Introduction

- Remember: path computation requires information about links
 - Done by adding TE-specific extensions to IGP (OSPF and IS-IS)
 - Hence limited to AS (IGP scope)
- Interdomain LSPs necessary for
 - TE in the large
 - large-scale deployment of services, e.g. connecting voice gateways, pseudowires, BGP/MPLS Layer 3 VPNs
- Inter-AS LSPs can exist across different ISP but also within one ISP
 - E.g. when ISP 1 just bought ISP 2 in a different geographical location
- Limitation is not signaling path setup (RSVP TE can do that), but computing the path
 - Has to be done offline: online calculation requires IGP information
 - Multiprovider environment: calculation based on information about all the links, but ISPs may not want to share such details
 - Also no FRR


Interdomain Constraint Based Routing

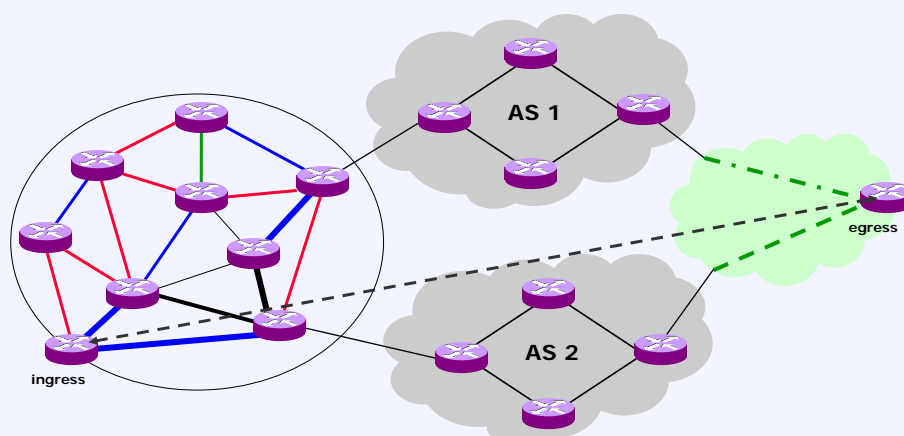

Constraints:

- Do not cross AS 2
- Do not use red links
- Use TE links with unreserved bandwidth > 2 Mbps


Interdomain Constraint Based Routing /2

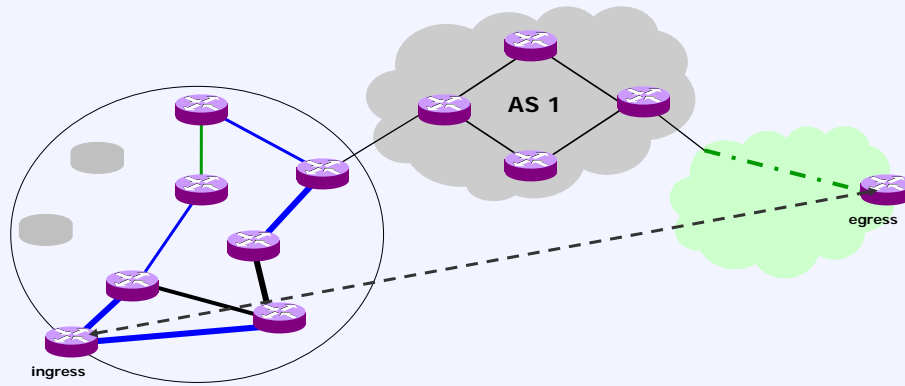

Constraints:

- Do not cross AS 2
- Do not use red links
- Use TE links with unreserved bandwidth > 2 Mbps


Interdomain Constraint Based Routing /3

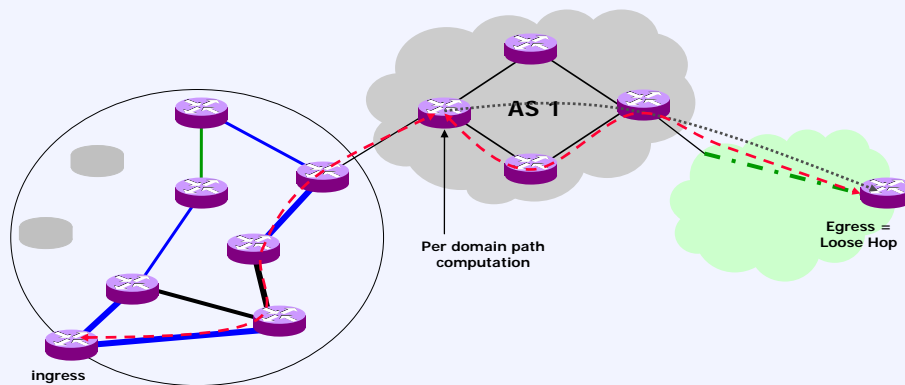

Constraints:

- Shortest path
- Loose routing

Interdomain LSP signaling

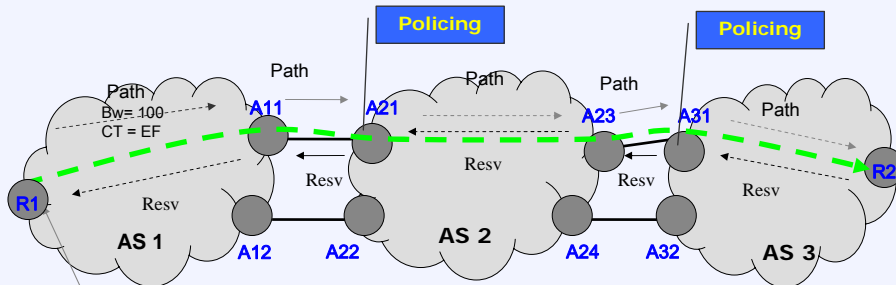


Inter-AS TE-LSP R1-R2 : bw = 100m, CT = EF


- Inter-AS TE-LSP signaling based on RSVP-TE
 - Explicit routing, local admission control, resources reservation & label distribution
- Path/Resv include QoS parameters
- Three signaling modes: **Contiguous LSPs**, **LSP stitching**, **LSP nesting**
- **Need for proper policing and filtering of RSVP-TE messages at SP boundaries**
 - **Filter/modify QoS parameters**

Interdomain path setup

- **Contiguous LSP**
 - End-to-end LSP is built across domain boundaries, using hop-by-hop signaling between adjacent neighbors; similar to setup within one domain




- **LSP stitching**
 - Smaller LSPs (**TE LSP segments**) set up in different domains
 - "Stitched" together (connected) at **stitching points** (domain boundaries)
 - **1:1 mapping of forwarding state** at stitching points \Rightarrow creating a new TE LSP requires establishing new LSPs within all domains
 - LSP functions such as reoptimization and FRR limited to domains
 - End points are usually a domain's ingress and another domain's egress (**Provider Edges, PEs**)
 - Setup: preconfigured or triggered by LSP setup message from neighboring domain



Interdomain path setup /2

- LSP nesting
 - Tunnel TE LSP within LSP with per-domain scope (Forwarding Adjacency (FA) LSP) as it crosses a domain
 - Stack labels: FA LSP head end pushes FA LSP label on top of nested LSP's label stack
 - Possible to map multiple TE LSPs into one FA LSP (1:N mapping)
 - Stitching requires 1:1 mapping \Rightarrow forwarding state increases linearly with no. of LSPs
 - Several benefits: e.g. admission control possible for TE LSPs at FA LSP head end, FA LSP's reoptimization and FRR can be used

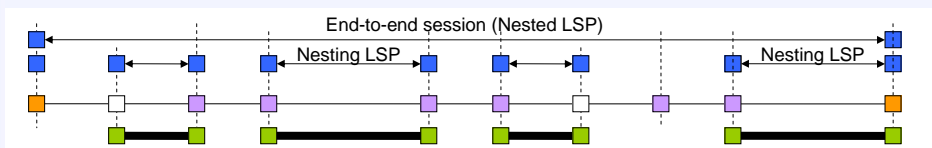


- LSP nesting more efficient - so why stitch?
 - Easier configuration for TE because of 1:1 mapping: ensure that all per-domain LSPs match requirements of TE LSP (requires admission control when nesting)
- Decision for method based on administrative policies at border router

Interdomain path computation

- Limited by per-domain knowledge available to the computing node
 - Constrained by location / ownership of that node: head end, offline tool, domain boundary node?
- Straightforward possibility: establish contiguous LSP where all hops are precomputed and signaled with Explicit Route Object (ERO)
 - Path computation must have interdomain scope (and visibility)
 - Possible with offline tool
- More sophisticated: separate per-domain path computation
 - ERO expansion: calculate path segment between border routers, add to ER
 - But TE constraints can vary between domains, and be incompatible (e.g. DiffServ based vs. link colors vs. max. capacity) \Rightarrow mapping needed
 - Implies that administrators cooperate to agree on a mapping
 - Topology information and TE characteristics (or mapping) needed

Per-domain path computation

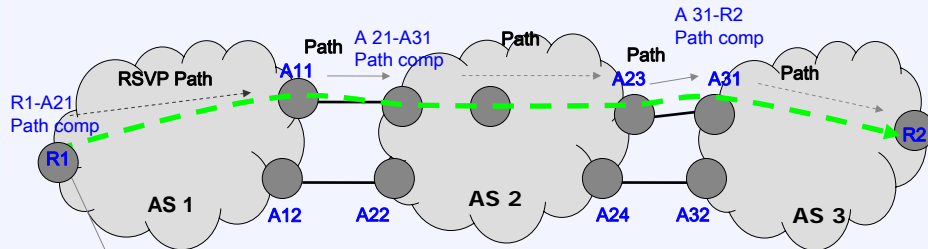


Inter-AS TE-LSP R1-R2 : bw = 100m
 ASBR-Path: A21-A31-R2

- Done when visibility not given across all domains
 - from one border router to the next; assumption: address of egress border router known
 - Configured as loose hop or discovered dynamically based on IP reachability for LSP destination address \Rightarrow path to border router
- Path to border router can be used...
 - Contiguous LSP setup: during ERO expansion
 - Stitching: for setting up relevant TE LSP segment
 - Nesting: for setting up FA LSP

Per-domain path computation /2


- Problem: limited knowledge
 - \Rightarrow per-domain optimal path may not yield optimal end-to-end path

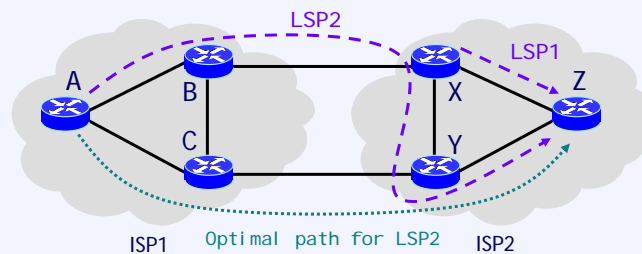

- Example above: assume similar link bandwidths
- From A's point of view, B is as good as C
 - but path via C would have been better - unknown to A
 - can yield bad performance, but also admission control failure (e.g. if link X-Y does not exist or does not have enough resources)

Intradomain failures


- Example on previous slide: what if reason to choose C instead of B (LSP1) is on the interdomain link (B-X)?
 - Admission control fails
 - Reason undetected because interdomain link is not in TED
 - Possibility: include it (via IGP advertisements)
 - But LSP setup can still fail - e.g. if resources become unavailable between time of computing and signaling
 - One ISP can prevent this from happening for its own links only
- Recall: intradomain link failure restoration
 - Node where admission control fails sends path error message to head end
 - Head end calculates backup path; topology knowledge assumed

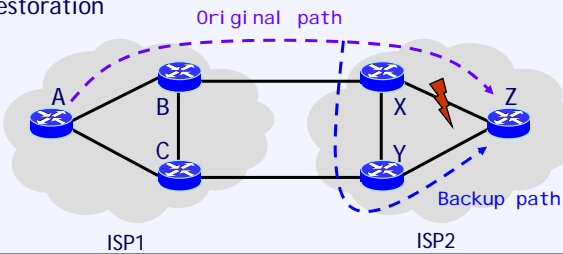

⇒ different solution needed

Crankback

- What if link X-Y does not exist or does not have enough resources?
 - X cannot find a backup path
 - But a backup path would exist: A-C-Y-Z
 - Solution: treat X as the blocked resource, move computation back one step at a time, away from point of failure (signaled with RSVP extensions)

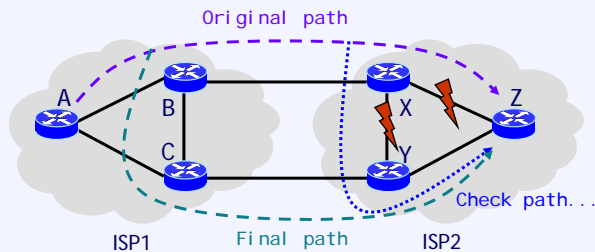

- As above, result may not be ideal; crankback has several other issues
 - e.g. need to avoid pointless probing for paths which are unavailable

Path Computation Element (PCE)

- Idea: problems before do not occur when the *whole* path is specified at the head end
 - Path Computation Element (PCE) was designed for that purpose: know everything, enabling offline computation of ideal interdomain path
- Reasons for offline computation:
 - Constraint communication:
 - intradomain: some constraints (e.g. link colors) must only be known at the head end
 - interdomain: all nodes participating in path computation must learn constraints
 - Need for extra visibility: for interdomain LSPs which have head and tail ends in the same domain but traverse other domains
 - Constraint translation: static mapping or have a different entity translate
 - Optimality of the solution: CSPF may not suffice

Path Computation Element /2

- PCE can be a module on a router or a separate entity that a router communicates with
- Issues that must be solved for towards a PCE based solution (current work in progress in IETF PCE WG)
 - Router-PCE communication protocol
 - PCE-PCE communication protocol
 - PCE discovery: how does a router find a PCE? Autodiscovery desirable
 - extensions for IS-IS and OSPF have been specified
 - Acquiring TED
 - Develop suitable computation algorithm (not standardized, left flexible)

Reoptimization

- Reminder about reoptimization:
 - dynamic calculation of better path, triggered by e.g. operator request, expiration of a timer, .. at head end
 - usually make-before-break
 - two steps: path computation and signaling
- **Interdomain environment:** path computation method and signaling method influence how reoptimization works
 - **per-domain computation** is good because...
 - reoptimization can be done within one domain
 - reasons for reoptimization are usually local ones
 - interdomain LSP's head end is unaware \Rightarrow better scalability
 - ... but can violating tight constraints (consider previous examples of nonoptimal solutions from local decisions)
 - **Contiguous LSP:** head end must be in control
 - RSVP extension for signaling reoptimization requests to downstream nodes
 - Better control of interdomain LSP but increased complexity

Multi-domain Route Recording


- Signaling mechanism providing for diagnostic information about the path of an established LSP
- Route record processing at inter-domain boundaries
 - boundary node may remove, filter or aggregate some of the recorded information for trust/confidentiality/policy reasons
 - route record may not be available on a Path message
 - in case of per domain boundaries path computation
 - computed path may loop back into a domain that has already been crossed by the LSP
 - loop avoidance: information pruning during path computation using the route record in Path message

Protection and FRR

- End-to-end protection path diversity desirable for primary / secondary path
 - attaining this in a multi-provider environment is more difficult
- Local protection
 - within each domain: no difference to interdomain LSPs
 - **Stitching**: protection path is applied to TE LSP segment
 - **Nesting**: protection path is applied to FA LSP
 - no other special mechanisms needed
 - between domains: PLR and MP in different domains
 - how to identify the MP and compute path to it?
 - independent of LSP setup method

Fast Reroute

Inter-AS TE LSP R1->R2
Bandwidth = 100Mbps, Delay bound = 200ms

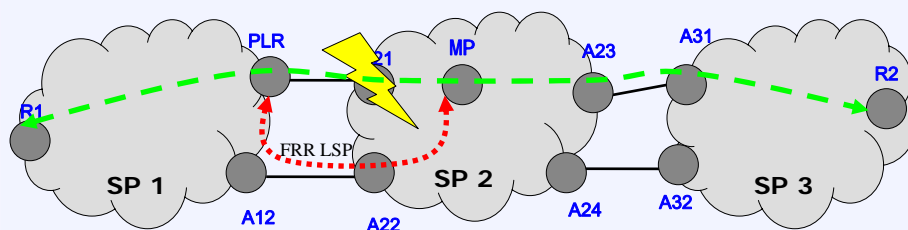

- How does PLR learn about MP?
 - typically done via RRO using interface addresses
 - Not available in interdomain setup \Rightarrow FRR specification extended to advertise node ids (loopback addresses)
 - **Contiguous LSP**: MP can be any downstream node
 - **Stitching or nesting**: MP can only be the tail of TE LSP segment or FA LSP

Summary

- Interdomain TE somewhat more complex than intradomain
 - path calculation based on incomplete information, mapping / translation of constraints, ...
- Three methods of signaling LSP setup (contiguous, stitching, nesting) influence operations on intradomain LSP
- Management challenges: policies and contracts needed between provider edges
 - interprovider LSPs require a certain level of trust
 - requests to head end may be rate limited at domain edge to avoid DoS
 - LSP setup requests must be authenticated, types of requests typically negotiated ahead of time at domain boundaries

References

- Ina Minei, Julian Lucek: "MPLS-Enabled Applications", John Wiley & Sons, 2005, ISBN: 0-470-01453-9
- Slides from Dimitri Papadimitriou
 - Thanks!!!